INTRODUCING TOROS UVR

Nothing has ever treated your lube oil, hydraulic oil or EHC fluids better than TOROS UVR (Ultimate Varnish Removal). No matter if it's a mineral oil or a phosphate ester-based fluid, UVR offers a tailored solution.

Powered by:

Fluitec

DELTA-XERO
THE FUTURE IS SYSTEM RELIABILITY

toros. UVR

UVR (Ultimate Varnish Removal) has been uniquely engineered with decades of industry experience to provide the performance, design simplicity, and reliability the market demands in order to achieve **low total cost** of ownership.

Primarily DXO cartridges of the **revolutionary Delta-Xero** fights with water, solid particles, soluble and insoluble varnish thanks to the nanotechnology structure. In the second stage, ESP & ENDURE iX resins of the **innovative Fluitec** beholds varnish, acidity and oil degradation byproducts.

Filter Elements

	UVR 3ESP UVR 3NDR	UVR 4ESP UVR 4NDR	UVR 6ESP UVR 6NDR
Length (B)	1.000 mm	1.400 mm	1.400 mm
Width (A)	600 mm	600 mm	600 mm
Height (C)	1.300 mm	1.300 mm	1.300 mm
Weight *	105 kgs	120 kgs	130 kgs
Inlet-Outlet Connection	G ½”	G ½”	G ½”
Reservoir Volume	7.500 lt	10.000 lt	15.000 lt
Flow Rate @ 50 Hz	3 lpm	4 lpm	6 lpm
Operating Temperature		30 ~ 90 °C	
Dirt Holding Capacity	4,5 kgs	9 kgs	27 kgs
Water Holding Capacity	2,6 lt	5,2 lt	15,6 lt
DXO Cartridges	3 pcs	4 pcs	6 pcs
ESP / Endure IX Media	1 pc	1 pc	1 pc

** Shipping weights vary with product model and filtration options. All weights dry and include media.*

UVR 3 ESP

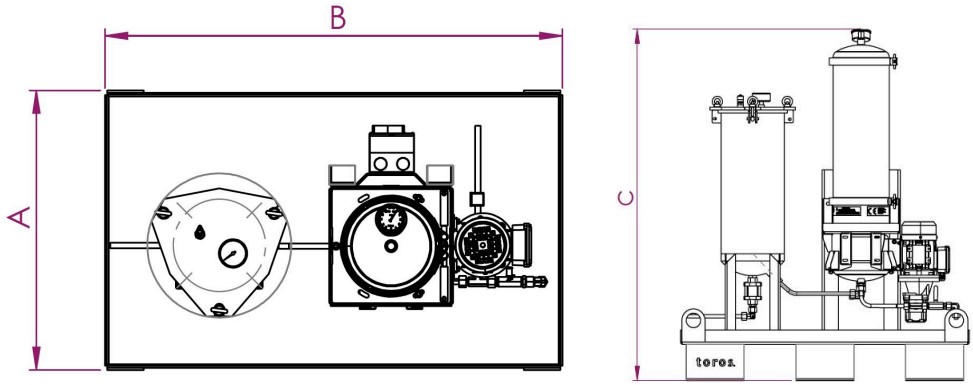

UVR 4 ESP

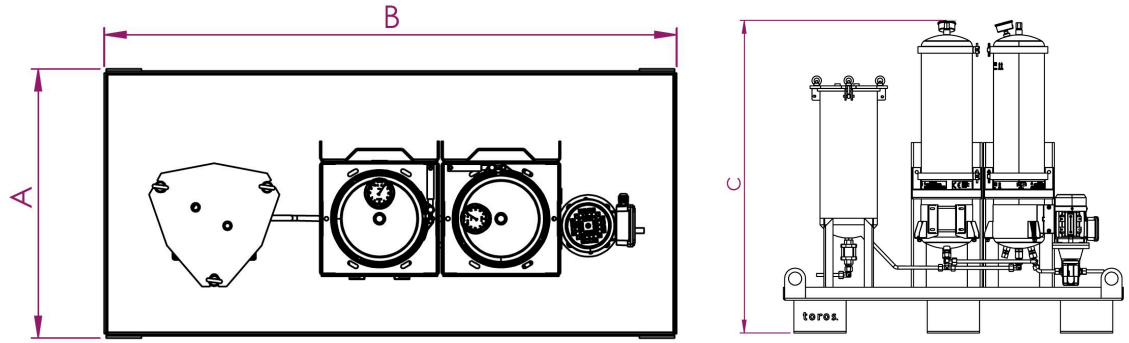

UVR 6 ESP

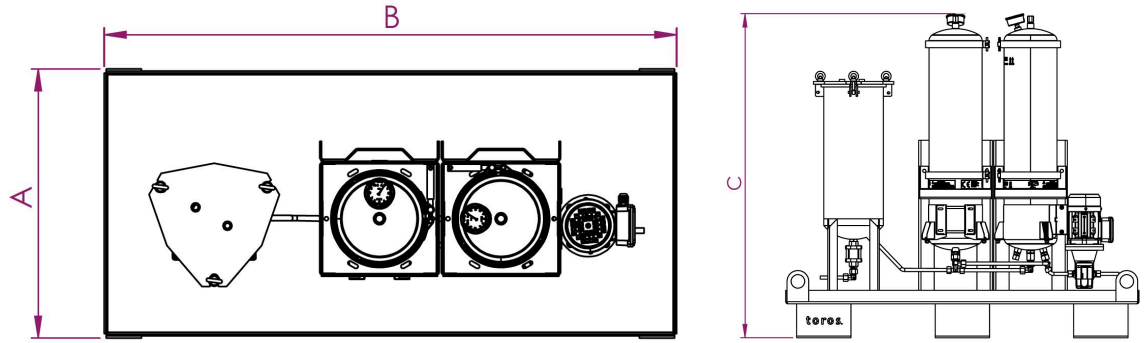

	UVR 9ESP UVR 9NDR	UVR 12ESP UVR 12NDR	UVR 24ESP UVR 24NDR
Length (B)	1.600 mm	2.000 mm	2.000 mm
Width (A)	800 mm	800 mm	1.000 mm
Height (C)	1.300 mm	1.300 mm	1.500 mm
Weight *	145 kgs	205 kgs	320 kgs
Inlet-Outlet Connection	G ½”	G ¾”	G 1”
Reservoir Volume	22.500 lt	30.000 lt	60.000 lt
Flow Rate @ 50 Hz	9 lpm	12 lpm	24 lpm
Operating Temperature		30 ~ 90 °C	
Dirt Holding Capacity	40,5 kgs	54 kgs	108 kgs
Water Holding Capacity	23,4 lt	31,2 lt	62,4 lt
DXO Cartridges	9 pcs	12 pcs	24 pcs
ESP / Endure IX Media	2 pcs	2 pcs	3 pcs

** Shipping weights vary with product model and filtration options. All weights dry and include media.*

UVR 9 ESP

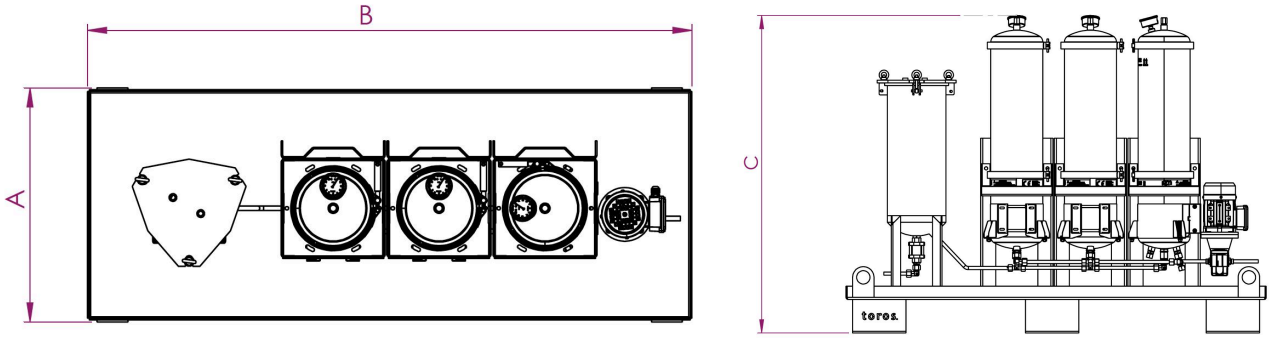

UVR 12 ESP

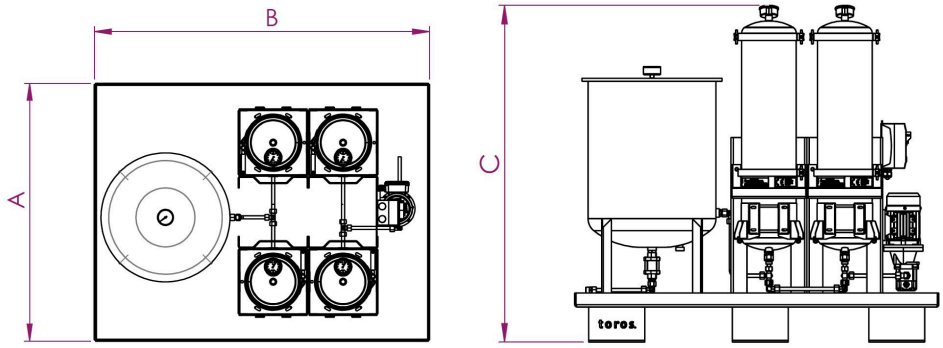

UVR 24 ESP

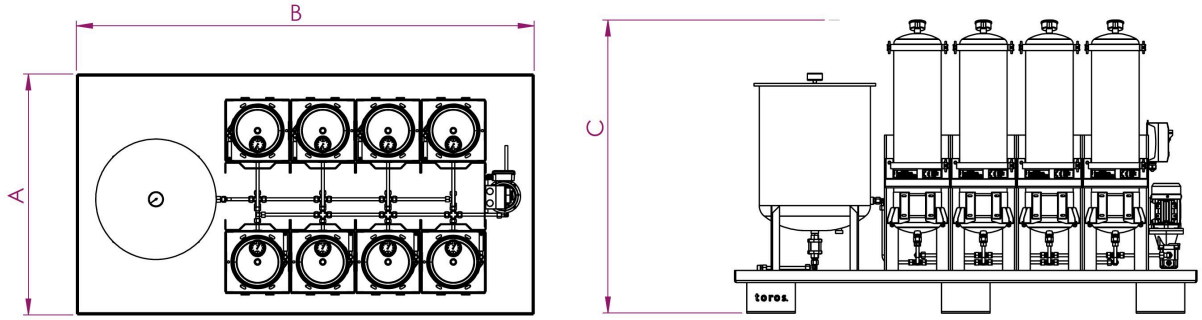

toros.

Collaboration. Technology. Experience.

torosfiltrasyon.com

+90 850 532 0230